

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GOVEE MOMENTS (DE) HANDEL GmbH

Supplier's address: Chen Bing, 1st Floor Newmarket House, Newmarket Square, The Coombe, Dublin 8, DUBLIN, Ireland, D08VAP9

Model identifier: H6072

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	230VAC,50Hz,E27		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 138 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...6500
On-mode power (P_{on}), expressed in W	24,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,50	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	1 200	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	20	
	Depth	12	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,504 0,415
Parameters for LED and OLED light sources:			
R9 colour rendering index value	34	Survival factor	1,00
the lumen maintenance factor	0,94		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,92	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4


(a): not applicable;

(b): not applicable;

H6072(6500K)

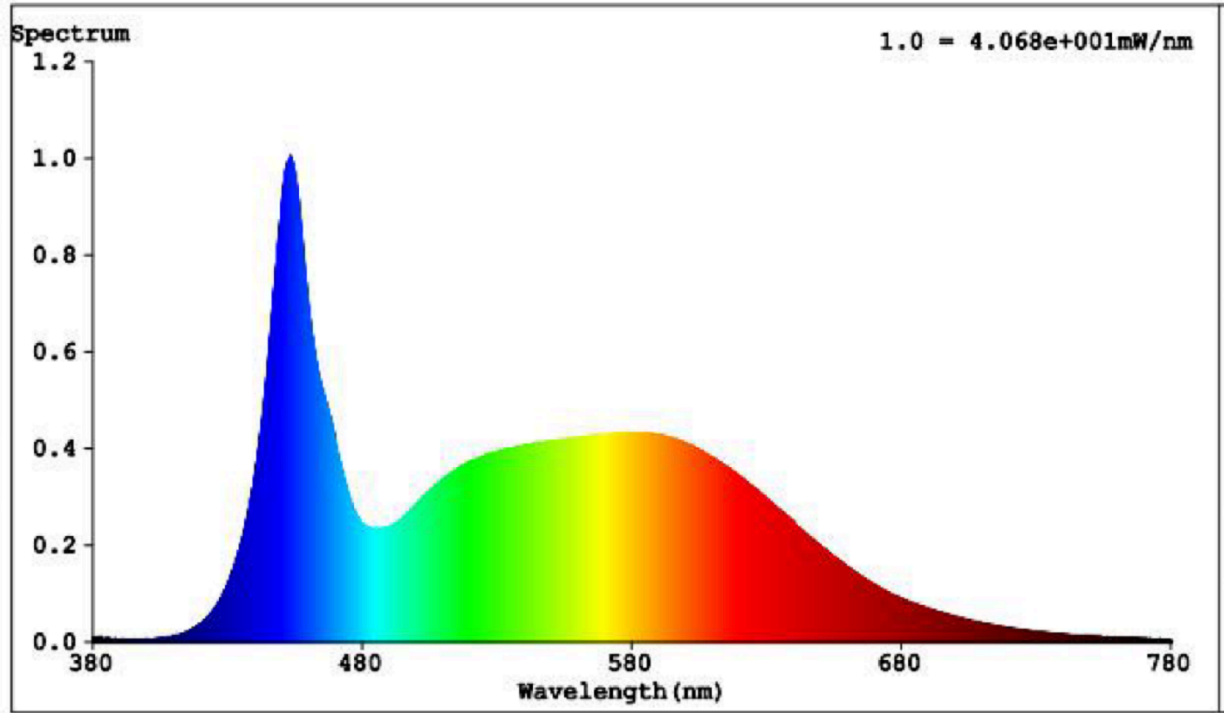

Model placed on the Union market from 14/08/2020



EPREL registration number: 901684

<https://eprel.ec.europa.eu/qr/901684>

Supplier: GOVEE MOMENTS (DE) HANDEL GmbH (Authorised representative)

Website:

Customer care service:

Name: Chen Bing

Website: [1st Floor Newmarket House, Newmarket Square, The Coombe, Dublin 8, DUBLIN, Ireland, D08VAP9](#)

Email: info@sunrisemoments.com

Phone: +35314169660

Address:

1st Floor Newmarket House, Newmarket Square, The Coombe, Dublin 8, DUBLIN, Ireland, D08VAP9